

Preparing the rear strap. Note the Loop in the middle. The safety leash strap will lock there.



Thread each end through the foam body.



Completed



The two containment straps that will be attached to the rear strap.



Shows the Containment strap attached to the rear strap. However, do not do this step until after the cover is installed.



Place the cover on top with the hole facing to the rear. The loop on the rear strap will come through this hole with the gold ring



Thread the rear strap through each side of the cover.



Image shows the rear strap threaded through body and cover.



This image shows the loop on rear strap threaded through the gold ring hole.



Attach the containment straps to the rear strap using the male/female clips



Safety leash strap that will attach in the middle of the rear strap. Notice - at this point the one you have may or may not be locked in a circle as this one is.



If your <u>leash</u> strap is locked in a circle, Unlock it & Thread it through the loop on the rear strap



Relock the safety leash strap.



Done with the rear part of the Console Lookout.






Thread it through one side of the front cover and front of foam body.









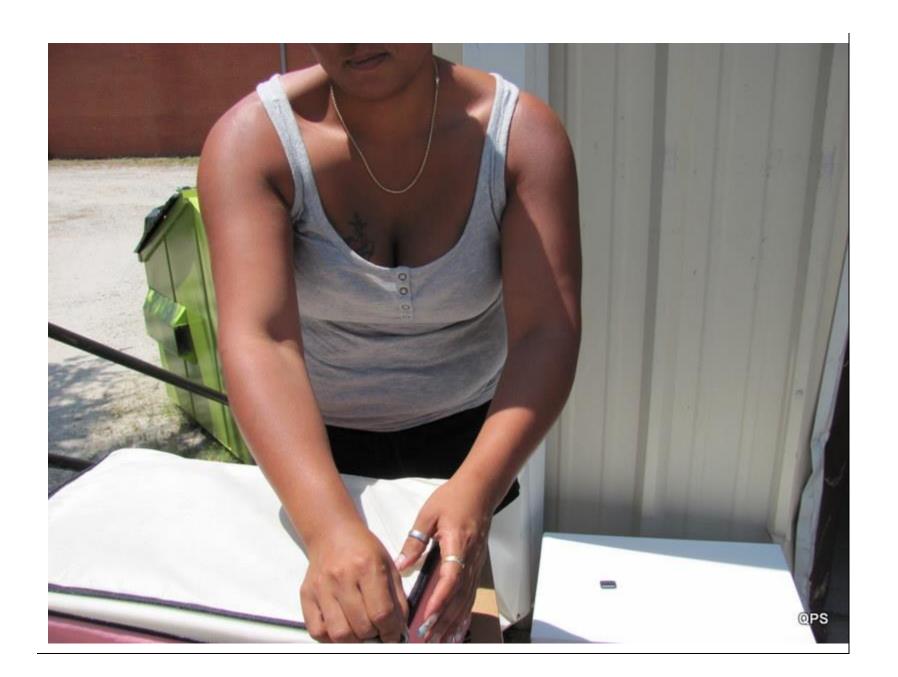








All the following pictures demonstrate how to thread the slider and male/female lock on the strap. Here it goes through the back part of the slider first



Loop it up, and then down through the front of the slider.



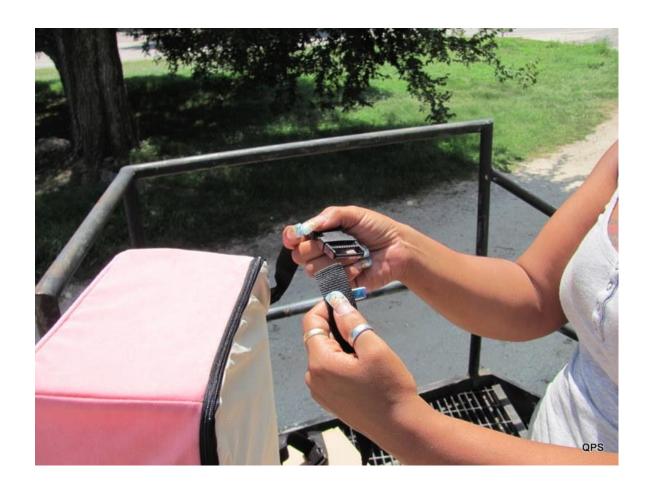

This picture and the following pictures show doing the same with the male/female lock.



